

→ Direct Flow Reverse Osmosis

# RO BOLT 1000 GPD

(Ref. 911094)

## SPECIFICATIONS

RO WATER PRODUCTION	2,8 lpm
WEIGHT	7 kg
INLET TEMPERATURE (max.-mfi.)	38°C / 5°C
INLET TDS (max.)	1500 ppm
INLET PRESSURE	4 bar - 1 bar (400kPa-100kPa)
MEMBRANE	1000 GPD
FAUCET	Smart faucet
PUMP	Diaphragm Booster Pump of high performance
POWER SUPPLY	24 Vdc 7A 168W
EXTERNAL ADAPTER	200-240V. 50/60Hz
PREFILTER	triple. filtration 5 microns, carbon activated block 10 microns and postfilter activated carbon block 10 microns



FILTER  
CONTROL



QUALITY  
CONTROL



SOUND  
WARNINGS



SMART  
FAUCET



LED  
STATUS



SECURITY  
LOCK



HIGH  
EFFICIENCY



AQUASTOP  
SYSTEM



## ORIGINAL SUPPLIES

Prefiltro triple PP + carbón + postfiltro (Ref. 910718)

Membrane RO 1000 GDP (Ref. 911098)


## MAINTENANCE NOTICE SYSTEM

**11 MONTHS** - Maintenance light warning system

**12 MONTHS** - Acoustic maintenance warning system

**15 MONTHS** - Computer lock

**Security lock for high consumption** - The system gives you a warning when consuming 5000 liters to prevent chlorine from entering the membrane

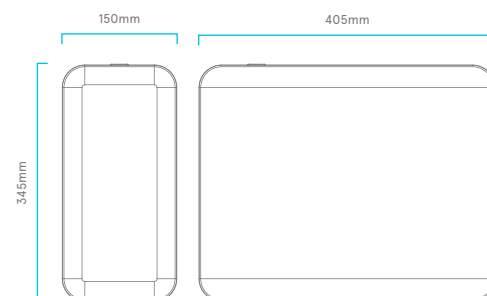

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.