

## EASY TO INSTALL AND MAINTENANCE.

### A DESIGN CONCEIVED FOR YOUR COMFORT

A simple twist is all it takes to change the filters. The filter will come out easily and can be replaced so that your equipment will always look as good as new.

### ILLUMINATED DISPLAY

Indicates the status of the filters, water quality and possible faults.

### COMBI FILTER

**SEDIMENT + CARBON BLOCK**  
The first one removes sediments, corrosion and other suspended solids. The second removes odours and flavours.

### MEMBRANE

**HIGH PERFORMANCE**  
Removes organic compounds and other micro-organisms present in water.



## PURE WATER, DIRECTLY FROM YOUR TAP TO YOUR GLASS.

Enjoy healthy water uninterruptedly, in quantity and quality. Without generating waste or using plastics that pollute the planet.

## THE VALUE OF SUSTAINABILITY

#nonplastics

HIGH PRODUCTION.  
NO DEPOSIT.

1.7 LPM  
600 GPD



HIGH PRODUCTION  
HIGH WATER SAVINGS  
MAXIMUM VERSATILITY



### ADVANTAGES OF HAVING RO LYKKE AT HOME

Direct flow of pure water.

No standing water tank.

Modern and versatile design.

Low maintenance cost.

Long filter and membrane  
membrane.

Tap with intelligent display.

lykke  
Direct Flow



EQUIPO  
UNE 149101  
CERTIFICADO



CONTROL  
OF FILTERS



CONTROL  
QUALITY CONTROL



INDICATORS  
ACOUSTIC



EASE OF  
ACCESS AND  
MAINTENANCE



INDICADORES  
LED



ENGINE  
HIGH-PERFORMANCE  
PERFORMANCE



HIGH  
EFFICIENCY



## A NEW GENERATION OF REVERSE OSMOSIS.

Instant unlimited water,  
no deposit.

Explore new dimensions  
in your kitchen with RO Lykke.



### The pleasure of drinking and cooking.

Pure water for washing vegetables and fruit.  
Freshly purified water for cooking and enhancing  
the flavours of herbal teas and coffee and maintain-  
ing the crystal clear transparency of ice cubes.



## THE IMPORTANCE OF GOOD HYDRATION.


**RO Lykke** reduces substances  
such as microorganisms, heavy  
metals, pesticides, etc. by almost  
100%. Only what you want will  
remain.

### TECHNICAL SPECIFICATIONS

Purification technology: Direct flow reverse osmosis.  
Pre-filter: Combined sediment + GAC carbon filter.  
Reverse osmosis membrane: High performance membrane. 600GPD.  
Flow rate: 2 LPM.  
Water Efficiency/Recovery Ratio: Up to 60%.  
(depending on water quality)  
Power supply: 24VDC / 36VDC  
Weight (including all accessories): 12,5 Kg

### INLET WATER REQUIREMENTS

Inlet temperature (max. / min.): 38 °C / 5 °C  
Inlet TDS (max.): 1500 ppm  
Inlet pressure (max. / min.): 4 / 1 bar (400-100KPa)  
Max. hardness: 20°.

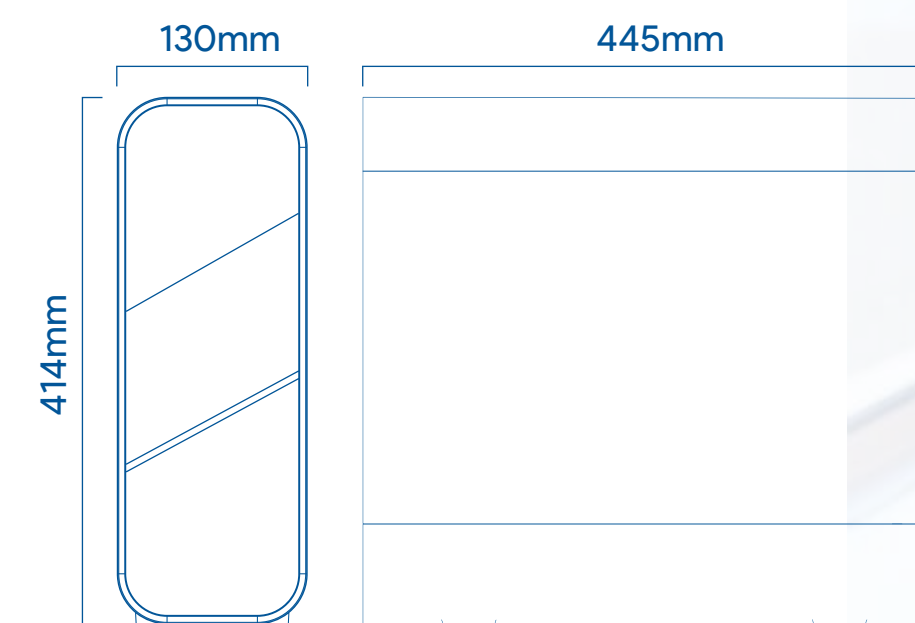

## WATER IS HEALTH

PURE, SAFE, HIGH QUALITY  
HIGH QUALITY WATER.

