

→ Columbia Aqua Osmosis Dispenser

FC 1400 UV ROP


(Ref. 796782)

DESCRIPTION

Cold, hot and ambient water dispenser fountain. Equipped with reverse osmosis system and booster pump. Double UV germicidal system in tank with leakage system. Tactile selection buttons. Ample space for bottles. Energy saving system.

CHARACTERISTICS

| | |
|--------------------------|--|
| TEMPERATURE | Cold - Hot - Ambient |
| OPERATING SYSTEMS | Reverse osmosis |
| POWER SUPPLY | 220-240 VAC / 50 Hz |
| COLD WATER TEMPERATURE | 4 - 13°C |
| COOLING CAPACITY | 10 L/H |
| HEATING CAPACITY | 7 L/H |
| TEMPERATURE CONTROL | Adjustable capillary thermostat / Clixon |
| COLD WATER TANK | 8 Liters |
| HOT WATER TANK | 3 Liters |
| INLET / DRAIN CONNECTION | 1/4" |
| COLD WATER TANK MATERIAL | Stainless steel AISI 304 |
| COMPRESSOR POWER | 120W |
| POWER HEATING | 600W |
| COMPRESSOR REFRIGERANT | R - 600a |
| HOT WATER TEMPERATURE | 80 - 85°C |
| REFRIGERATION SYSTEM | In-tank heat pump |
| HEATING EQUIPMENT | Electrical resistance in tank |
| WEIGHT | 30 Kg |
| PRESENTATION | Soil |
| WATER TREATMENT SYSTEM | 1 Filter 5 microns 2 GAC filter 1 Membrane 80 GPD 1 Alkalizing filter |

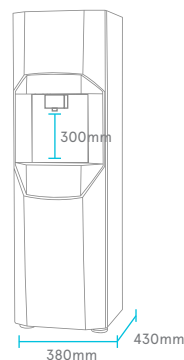

| | |
|-------------------------|------------|
| INLET WATER PRESSURE | 6 ~ 1 BAR |
| INLET WATER TEMPERATURE | 38°C ~ 4°C |
| AMBIENT TEMPERATURE | 40°C |



WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF1800008U6 and 13/02/2018 as a date of entry of the authorization.