

→ Direct Flow Reverse Osmosis

RO KLEIN 800

(Ref.911027)

DESCRIPTION

Advanced direct flow equipment.
Instant unlimited water.
No accumulation tank.
Electronic faucet.
Water quality and filter useful life notice.

CHARACTERISTICS

WEIGHT	16 kg
FLOW	1'5/2 LPM
INLET TEMPERATURE	38 ° C - 5 ° C
TDS INPUT	1500 ppm
INLET PRESSURE	1 / 4 bar 100 - 400 kPa
FILTER	Combined PP + active carbon
MEMBRANE	800 GPD
FAUCET	Smart faucet
PUMP	Booster
ELECTRICAL POWER SUPPLY	24 Vdc 95 W
EXTERNAL ELECTRICAL ADAPTER	110 - 240V. 50/60Hz 24 W.



CLICK



FILTER CONTROL




AQUASTOP

DIRECT
FLOWLED
STATUSHIGH PERFORMANCE
MOTORCAPSULATED
MEMBRANESMART
FAUCET

ORIGINAL FILTERS

Combi sediment + carbon filter (Ref. 910425)
800 GPD membrane (Ref. 911030)

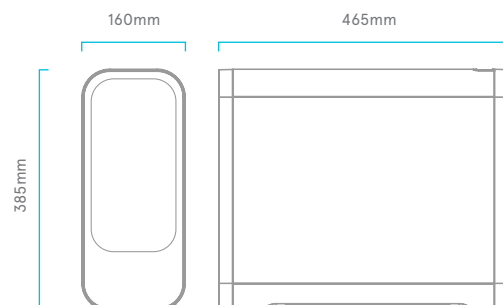

WLG (B-60326279), is member of
the Water Quality Association.



ACCREDITED BY ENAC
Certif. n° 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.