

## → Columbia Aqua Osmosis Dispenser

**FC 1400 UV ROP**


(Ref. 796782)

**DESCRIPTION**

Cold, hot and ambient water dispenser fountain. Equipped with reverse osmosis system and booster pump. Double UV germicidal system in tank with leakage system. Tactile selection buttons. Ample space for bottles. Energy saving system.

**CHARACTERISTICS**

TEMPERATURE	Cold - Hot - Ambient
OPERATING SYSTEMS	Reverse osmosis
POWER SUPPLY	220-240 VAC / 50 Hz
COLD WATER TEMPERATURE	4 - 13°C
COOLING CAPACITY	10 L/H
HEATING CAPACITY	7 L/H
TEMPERATURE CONTROL	Adjustable capillary thermostat / Clixon
COLD WATER TANK	8 Liters
HOT WATER TANK	3 Liters
INLET / DRAIN CONNECTION	1/4"
COLD WATER TANK MATERIAL	Stainless steel AISI 304
COMPRESSOR POWER	120W
POWER HEATING	600W
COMPRESSOR REFRIGERANT	R - 600a
HOT WATER TEMPERATURE	80 - 85°C
REFRIGERATION SYSTEM	Heat pump
HEATING EQUIPMENT	Electrical resistance
WEIGHT	30 Kg
PRESENTATION	Soil
WATER TREATMENT SYSTEM	1 Filter 5 microns 2 GAC filter 1 Membrane 80 GPD 1 Alkalizing filter
GERMICIDAL SYSTEM	UV LED (2 units in tank)

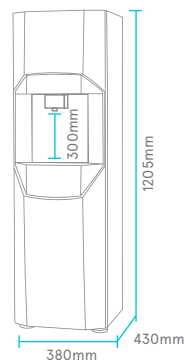

INLET WATER PRESSURE (max-min)	6 ~ 1 BAR
INLET WATER TEMP. (max-min)	38°C ~ 4°C
AMBIENT TEMPERATURE (max)	40°C



WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF1800008U6 and 13/02/2018 as a date of entry of the authorization.