

→ Columbia Aqua Ultra Filtration dispenser

FC 1400 UV UF


(Ref. 796783)

DESCRIPTION

Cold, hot and ambient water dispenser.
Equipped with ultra filtration system and booster pump.
Double UV germicidal system in tank with leak detection system.
Tactile selection buttons. Ample bottle space. Energy saving system.

CHARACTERISTICS

TEMPERATURE	Cold - Hot - Ambient
OPERATING SYSTEMS	Ultrafiltration
ELECTRICAL POWER SUPPLY	220-240 VAC / 50 Hz
COLD WATER TEMPERATURE	4 - 13°C
COOLING CAPACITY	10 L/H
HEATING CAPACITY	7 L/H
TEMPERATURE CONTROL	Adjustable capillary thermostat / Clixon
COLD WATER TANK	8 Liters
HOT WATER TANK	3 Liters
INLET/DRAIN CONNECTION	1/4"
COLD WATER TANK MATERIAL	AISI 304 stainless steel
COMPRESSOR POWER	120W
HEATING POWER	600W
REFRIGERANT COMPRESSOR	R - 600a
HOT WATER TEMPERATURE	80 - 85°C
REFRIGERATION SYSTEM	Heat pump
HEATING SYSTEM	Electrical resistance in tank
WEIGHT	30 Kg
PRESENTATION	Floor
WATER TREATMENT SYSTEM	1.5 Micron filter 1 GAC Filter 1 Membrane 80 GPD 1 Alkalinizing filter
GERMICIDAL SYSTEM	UV LED (2 units in tank)

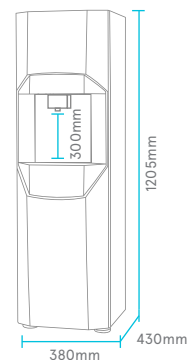

INLET WATER PRESSURE (max-min)	6 ~ 1 BAR
INLET WATER TEMP. (max-min)	38°C ~ 4°C
AMBIENT TEMPERATURE (max)	40°C



WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF1800008U6 and 13/02/2018 as a date of entry of the authorization.