

→ Direct Flow Reverse Osmosis

RO ALTYUM 3.0

(Ref. 910601)

SPECIFICATIONS

PRODUCTION	2 lpm
WEIGHT	12 kg
INLET TEMPERATURE (máx.-min.)	38°C / 5°C
INLET TDS	1500 ppm
INLET PRESSURE	4 bar - 1 bar (400kPA-100kPa)
MEMBRANE	600 GPD
FAUCET	Smart faucet
PUMP	High performance Diaphragm Booster Pumo
POWER SUPPLY	24 Vdc
EXTERNAL ADAPTER	100-240V. 50/60Hz: 24Vdc
PREFILTER	mixed pp 10 microns+high quality block carbon
POSFILTER	high quality carbon



FILTER CONTROL



QUALITY CONTROL



SOUND WARNINGS



SMART FAUCET



LED STATUS



VERSATILITY



HIGH EFFICIENCY



AQUASTOP SYSTEM




CARTRIDGES OF EXCLUSIVE CONNECTION

ORIGINAL CONSUMABLES

Cartridge combi CFRO (Ref. 910602)

Membrane RO 600 GDP (Ref. 910603)

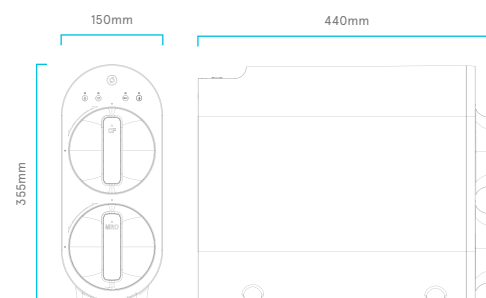

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF1800008U6 and 13/02/2018 as a date of entry of the authorization.