

→ Reverse osmosis

RO LYKKE

(Ref.910527)

Direct Flow system

DESCRIPTION

5-stage equipment
Installation kit
Intelligent faucet with status messages
High-performance membrane with self-flushing
Integrated hydraulic circuit
Easy maintenance

SPECIFICATIONS

WEIGHT	12,5 kg
FLOW	1,6-2,1 lpm
TEMPERATURE (max. - min.)	38 °C - 5 °C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4 - 1 bares (400kPa - 100kPa)
MEMBRANE	800 GPD
FAUCET	Smart faucet
PUMP	Booster
POWER SUPPLY	24VDC / 36VDC
EXTERNAL ADAPTER	230VAC 50/60 Hz


QUALITY
CONTROLDOUBLE
FLOWFILTER
CONTROLCAPSULATED
MEMBRANEFLUSHING
READYPRESSURE
PUMPLED
STATUS

WATER QUALITY WARNING

ORIGINAL CONSUMABLES

Combined pre-filter pp 5 µm+charcoal GAC (Ref. 910540)

Membrane RO 600 GPD (Ref. 910541)

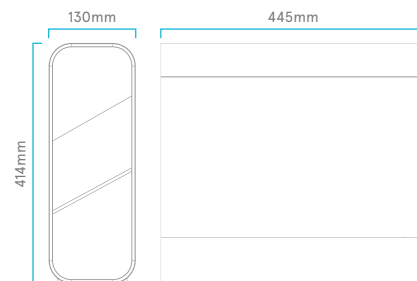

WLG (B-60326279), is member of
the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and
household appliances as well as
designing and teaching of
non-official training courses related
with its technology are certified and
comply with the UNE-ISO-9001 far
WLG (B-60326279).



WLG (B-60326279) is an Aqua
España member, who belongs Aqua
Europa (Federation of European
nation associations).



WLG (B-60326279), has the rights
granted for Authorized Economic
Operator with number
ESAE0F18000008U6 and
13/02/2018 as a date of entry of the
authorization.