

→ Reverse osmosis

RO STRYM

(Ref.910493)

Direct Flow system

DESCRIPTION

5-stage equipment
Installation kit
Intelligent faucet with status messages
High-performance membrane with self-flushing
Integrated hydraulic circuit
Easy maintenance

SPECIFICATIONS


WEIGHT	12,5 kg
FLOW	2 lpm
TEMPERATURE (max. - min.)	38 °C - 5 °C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4 - 1 bares (400kPa - 100kPa)
MEMBRANE	800 GPD
FAUCET	Smart faucet
PUMP	Booster
POWER SUPPLY	24VDC / 90W
EXTERNAL ADAPTER	100-240VAC 50/60 Hz 5A

QUALITY
CONTROLDOUBLE
FLOWFILTER
CONTROLCAPSULATED
MEMBRANEFLUSHING
READYSOUND
WARNINGSSMART
FAUCETLED
STATUS
**ELECTRICAL LEAK
SENSOR ELECTRICAL**
**WATER QUALITY
WARNING**

ORIGINAL CONSUMABLES

Combination filter pp 5 µm+carbon Block (Ref. 910507)

Membrane RO 800 GPD (Ref. 910508)

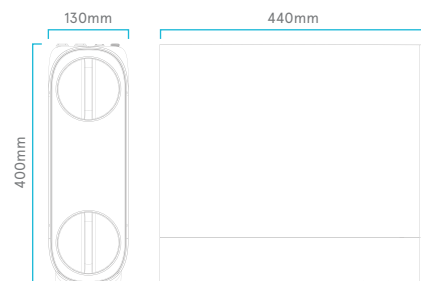

WLG (B-60326279), is member of
the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and
household appliances as well as
designing and teaching of
non-official training courses related
with its technology are certified and
comply with the UNE-ISO-9001 far
WLG (B-60326279).



WLG (B-60326279) is an Aqua
España member, who belongs Aqua
Europa (Federation of European
nation associations).



WLG (B-60326279), has the rights
granted for Authorized Economic
Operator with number
ESAEOF18000008U6 and
13/02/2018 as a date of entry of the
authorization.