

→ UV LED 25L WITH HIGH GERMICIDAL POWER

KINGLIGHT UV LED 25LPM


(Ref. 243620)

DESCRIPTION

Ideal equipment for the elimination of germs and microorganisms from water supplied by UV-C radiation.

CHARACTERISTICS


MAIN MATERIAL	PP, aluminum alloy
INPUT VOLTAGE	100V*240V 50/60Hz
OUTPUT VOLTAGE	24 Vdc 1A
WORKING TEMPERATURE	5°C - 50°C
PRESSURE	1 MPa
CONNECTIONS	3/8"
WORKING FLOW FILTERED WATER	2L/min
WORKING FLOW OSMOSIS WATER	25L/min
STERILIZATION RATE	≥99,9
SERVICE LIFE	> 3.000h
UV POWER	15W
GRADE WATER-PROOF	x7



GREEN
Waiting



BLUE
In operation




RED
End of useful life



FUNCTIONALITIES

Built-in flow switch.
It is activated when water flows and deactivated when water flow stops.
Does not heat the water.
Built-in LED status control.
For installations with 1/4" pipe, ask for the 3/8" - 1/4" reduction (Ref. 951014).

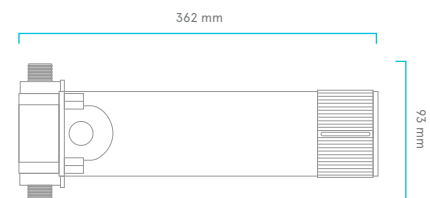

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEO18000008U6 and 13/02/2018 as a date of entry of the authorization.