

→ 5-stage reverse osmosis

RO VERSA PUMP

(Ref.752519)

DESCRIPTION

5-stage team
Installation Kit
Special 1-way tap
Greenfilter membrane
Integrated tank
High-performance pump

SPECIFICATIONS

DIMENSIONS	419 mm x 408 mm x 228 mm
WEIGHT	15 kg
INLET TEMPERATURE	40 °C - 2 °C
INLET TDS	2000 ppm
INLET PRESSURE	2.5 - bares 250 - kPa
MEMBRANE	1812 75 GPD
FAUCET	Mini Robin with ceramic valve
PUMP	UP 7000
POWER SUPPLY	24 Vdc 28 W
EXTERNAL ADAPTER	110 - 240V. 50/60Hz 24 W.

DIRECT
ACCESSDOUBLE
FLOW

CLICK



INSERT



VERSATILITY



AQUASTOP




CARBON



ORIGINAL CONSUMABLES

Prefilter sediments 5µm Inline Quick connector (Ref.651203)
GAC Inline Quick carbon prefilter connector (Ref.651201)
FP-A remineralizing post-filter (Ref.291920)
GREEN FILTER 75 GPD Membrane (Ref.767202)

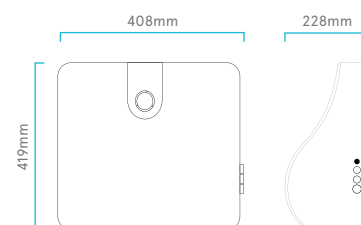

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.