

→ Ozone generator. Complement for hygiene and cleaning. Deodorizing and whitening effect.

LAUNDRY EVO

(Ref. 820514)

DESCRIPTION

Ozone sanitizer for home and washing machines.

SPECIFICATION

OZONE GENERATION IN WATER	0,4 - 1,2 ppm
INLET PRESSURE	2,7 - 5,2 bar (40-75 PSI)
FLOW RATE MIN. FRONTAL LOAD	4,25 l/min.
FLOW RATE MIN. UPPER LOAD	8 l/min.
POWER	Transformer input: AC 100-240V/50 -60Hz Transformer output: DC 12V 3A
DIMENSIONS (mm)	420 x 270 x 100 mm
WEIGHT	Net: 2,5 Kg Gross: 3 Kg
CONNECTIONS	Inlet: M - 3/4" Washing machine outlet: M - 3/4" Tap outlet: M - 3/4"



DIRECT ACCESS



EASY TO
USE



NO DETERGENTS
NOR SOFTENERS



BEST FOR
SENSITIVE SKIN




CLEAN WITHOUT
BLEACH



FILTER
CONTROL



DOUBLE FLOW
SELECTOR

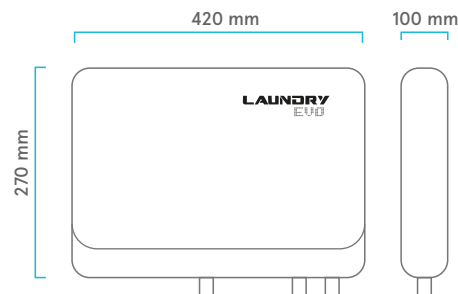

WLG (B-60326279), is member of the Water Quality Association.



ACREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAE0F18000008U6 and 13/02/2018 as a date of entry of the authorization.