

→ UV LED 50L WITH HIGH GERMICIDAL POWER

KINGLIGHT UV LED 50LPM

(Ref. 243622)

DESCRIPTION

Ideal equipment for the elimination of germs and microorganisms from water supplied by UV-C radiation.

CHARACTERISTICS

MAIN MATERIAL	PP
INPUT VOLTAGE	100V*240V 50/60Hz
OUTPUT VOLTAGE	24 Vdc 2A
WORKING TEMPERATURE	5°C - 50°C
PRESSURE	1 MPa
CONNECTIONS	1"
WORKING FLOW FILTERED WATER	25L/min
WORKING FLOW OSMOSIS WATER	50L/min
STERILIZATION RATE	≥99,9
SERVICE LIFE	3.000h
UV POWER	48W
GRADE WATER-PROOF	67



Green
In operation




Blue
Waiting



Red
End of useful life

FUNCTIONALITIES

Built-in flow switch.
It is activated when water flows and deactivated when water flow stops.
Does not heat the water.
Built-in LED status control.

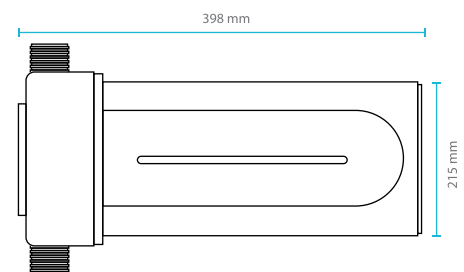

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAE0F18000008U6 and 13/02/2018 as a date of entry of the authorization.